



# ISODOOR V

## BY ISOSTORE

[SOUND CONTROL DOORS]

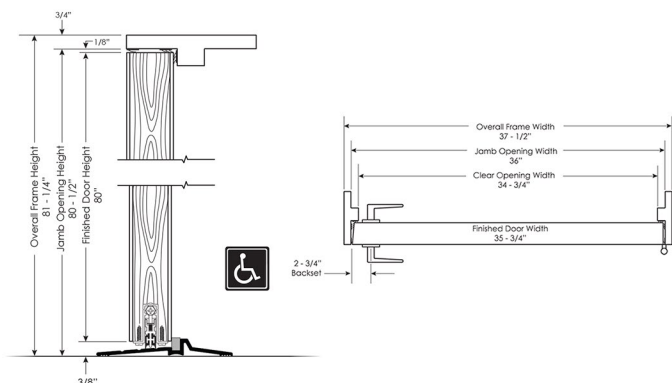

### Swing Specification

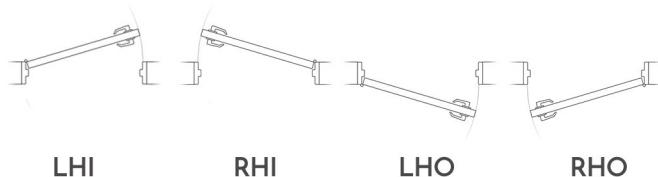

### Product Key Points

- WHERE TO USE**

The IsoDoor V is generally used in bedrooms, hotels, offices, vocal booths, mixing rooms, and other similar areas that require a better level of isolation than a solid wood or DIY built door in rooms with noise generally under 60

- dB. We recommend our IsoDoor V in walls rated up to STC 42.

#### UNIVERSAL DOOR THICKNESS

The 1-3/4" thick door slab allows our customers to use standard off-the-shelf door handles. The weight of the IsoDoor V, at 140 pounds for a standard size,

- is still an easy weight for two installers to handle.

#### FOOLPROOF INSTALLATION WITH GUIDE

No experience necessary to install our IsoDoors! We also include a full installation guide with step-by-step instructions on how to install our doors as

- single or double doors.

#### LOW PRICE, FANTASTIC QUALITY

Our customers are appreciative of our low pricing due to our factory direct approach to sales, but absolutely thrilled when they receive our doors and see quality was not sacrificed for those low prices!

## Technical Data for the IsoDoor V

**Door Size** Standard is 36" x 80". Other sizes of 30" x 80", 32" x 80", 36" x 84", and 36" x 96" are available.

**Door Thickness** 1-3/4"

**Weight** 140 pounds for standard 36" x 80"

**STC Rating** 37

**Fire Rating** 20 minute rating for door and jams.

**Material** Slab is standard with a birch veneer. Jams are standard with solid beech.

**Hardware** Includes continuous hinge and acoustic threshold in standard brushed nickel or black.

**Seals** Fully mortised acoustic door bottom included along with full perimeter seals for sides and top.



**ISOSTORE**  
EXPERT SOUND CONTROL

Toll-Free: 877-866-6473

Local: 208-514-1931

Email: [info@isostore.com](mailto:info@isostore.com)

Web: [isostore.com](http://isostore.com)